




## DOUBLE POINTED WELD PIN

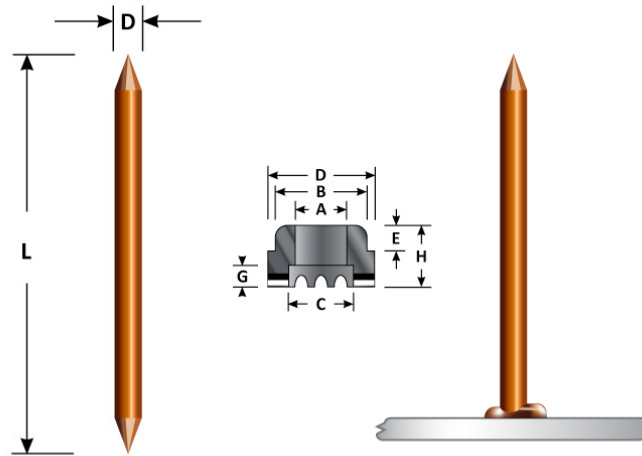

ferrules provided for arc welding applications

### DESCRIPTION

Double Pointed pins are normally welded with an Arc or Drawn Arc Stud Welding machine. It will also come with a ceramic ferrule, a component of the pin for arc welding. Like other weld pins, insulation is impaled over the welded pin and secured with a Self-Locking Washer. When arc welding, the pins can be welded to rough or contaminated surfaces, without preparation. Double Pointed pins can be welded with the AGM Model PA-15 CD Welder, but only to clean surfaces. Metal must be at least 1/16" thick to CD weld.

Visit our website at [www.StudWeldProd.com](http://www.StudWeldProd.com) or email [Info@StudWeldProd.com](mailto:Info@StudWeldProd.com)

**Downey, CA**  
 9459 Washburn Rd  
 Downey CA 90242  
 Ph: 800-252-1919  
 Fax: 562-862-3022

**Hayward, CA**  
 2391 American Ave  
 Hayward, CA 94545  
 Ph: 510-782-7883  
 Fax: 510-782-7918

**Kent, WA**  
 7820 S. 210th St #C103  
 Kent, WA 8032  
 Ph: 425-656-9787  
 Fax: 425-656-9786

**Phoenix, AZ**  
 3535 E Wier Ave #4  
 Phoenix, AZ 85040  
 Ph: 602-305-9350  
 Fax: 602-305-4890