




PERFORATED INSULATION HANGERS

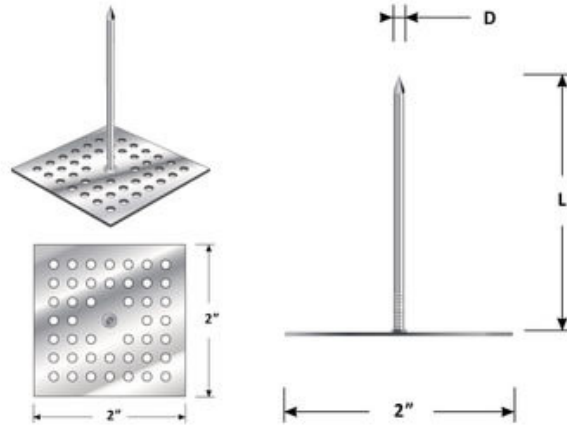

DESCRIPTION

Perforated Insul-Hangers are used to attach insulation with the use of general purpose adhesive. Surfaces must be clean and dry before adhesive is applied. Some protective coatings are not compatible with adhesives and it is recommended that the user make test bonds before proceeding with the application. After the hanger is installed, insulation is impaled over the spindle and secured with a self-locking washer

DIAMETER (D)	PLATE	LENGTH (L)
12 GA (.106)	2" square / nominal thickness .015"	1"
12 GA (.106)	2" square / nominal thickness .015"	1-5/8"
12 GA (.106)	2" square / nominal thickness .015"	2"
12 GA (.106)	2" square / nominal thickness .015"	2-1/2"
12 GA (.106)	2" square / nominal thickness .015"	3-1/2"
12 GA (.106)	2" square / nominal thickness .015"	4-1/2"
12 GA (.106)	2" square / nominal thickness .015"	5-1/2"
12 GA (.106)	2" square / nominal thickness .015"	6-1/2"
12 GA (.106)	2" square / nominal thickness .015"	8"
12 GA (.106)	2" square / nominal thickness .015"	8-1/2"
12 GA (.106)	2" square / nominal thickness .015"	9-1/2"
12 GA (.106)	2" square / nominal thickness .015"	10-1/2"

Standard length listed above, other lengths available as special order

Standard material is galvanized steel for pin and plate.

Available in stainless steel and aluminum as special order

Visit our website at www.StudWeldProd.com or email Info@StudWeldProd.com

Downey, CA

9459 Washburn Rd
Downey CA 90242
Ph: 800-252-1919
Fax: 562-862-3022

Hayward, CA

2391 American Ave
Hayward, CA 94545
Ph: 510-782-7883
Fax: 510-782-7918

Renton, WA

927 Thomas Ave SW
Renton, WA 98057
Ph: 425-656-9787
Fax: 425-656-9786

Phoenix, AZ

3535 E Wier Ave #4
Phoenix, AZ 85040
Ph: 602-305-9350
Fax: 602-305-4890